

PREPRUFE[®] Plus membranes

New generation PREPRUFE[®] membranes with unique PREPRUFE[®] ZipLap[™] for fast, simple and secure applications in all seasons and climates

For waterproofing and protection of slabs and confined walls below ground, Preprufe[®]Plus membranes develop an integral watertight adhesive bond to poured concrete to prevent water migration

Product Advantages

- **Fast, Simple and Secure** – engineered for efficient jobsite application and long term waterproofing performance.
- **Advanced Bond Technology[™]** reduces risk – develops an intimate and continuous adhesive bond to concrete proven to resist water migration at the highest pressures.
- **Preprufe[®] ZipLap dual adhesive watertight laps** – easy to execute year round even in harsh conditions; laps stay clean and dry until the seal is made.
- **Gas resistance** – Preprufe[®] 300R Plus LT is certified by BBA to score 2 points as a gas resistant barrier (see BS 8485:2015, Table 7) and additional 2.5 points as a structural barrier in Grade 3 basements (BS 8485:2015, Table 5).
- **Reduces cost and saves time** – fast installation, only 2 operator crew.
- **No hidden extras** – no primers, sealants, fillets or specialist equipment.
- **Extended exposure time** – unique UV barrier coating allows exposure up to 56 days prior to concreting, for programme flexibility or delays.
- **Lightweight, easier handling** – reduced storage area and better safety vs thicker, heavier, bulky technologies.
- **Simple system** – membrane and only single tape to install the waterproofing system.
- **Easy detailing** – flexible membrane in use but keeps its shape and conforms to corners and other construction details.
- **Smooth, non-absorbent surface** – unlike geotextile faced membranes, resists site contamination and easily cleaned before concreting to ensure intimate bonding.
- **No compartments** – integral adhesive bond eliminates the need for complex welded compartments used with unbonded membranes.
- **Cold applied, single layer** – no hot works, double layers or protection screed.
- **Tough HDPE waterproof geomembrane** – durable, tough, chemical and gas resistant. Also isolates structure from salts and sulfate attack.
- **25 Year Track Record** – Preprufe[®] membranes have been used on major projects around the world for more than 25 years.
- **Passive waterproofing** – unlike bentonite based systems, does not rely on activation, is unaffected by groundwater contaminants, rain or wet/dry cycling during site and building life.
- **Total GCP system** – full range of GCP hydrophilic and PVC waterstops available for concrete joint protection including wide movement joints (seismic area). Can be used in combination with GCP post-applied self-adhesive membrane range.

System Components

- Preprufe® 300R Plus and Preprufe® 300R Plus LT – for use on all horizontal applications. Superior damage resistance
- Preprufe® 160R Plus and Preprufe® 160R Plus LT – for use with concrete slab sections up to 500 mm thickness, or vertically with single sided formwork systems
- Preprufe® Tape – incorporating Preprufe® coating for continuous concrete adhesion at taped edges and details
- Bituthene® LM – high performance liquid membrane for detailing terminations at pile caps and pipe penetrations
- Adcor® 500S – hydro expansive waterstop system for preventing water entry through joints in concrete substructures.
- Adcor® 500T – hydro-expansive waterstop for preventing saline and brackish water entry through concrete construction joints.
- Adcor® 550MI/ 550 T-MI – hydro-expansive injectable waterstop for added security of concrete construction joints.
- AT System – co-extruded PVC waterstops for movement joints.

Application

Material Storage

Sequence deliveries to avoid delays, but minimize on-site storage. Select a safe, covered secure location for material storage. Store materials for each day's use in a location that won't require movement a second time. Do not double-stack pallets of waterproofing on the job site. Store protection boards flat and off the ground. Provide cover on top and all sides.

Substrate Preparation

Suitable substrates include:

- concrete blinding
- well compacted sand on rolled crushed stone
- rigid insulation
- clay heave boards
- permanent formwork
- removable formwork
- 19 mm plywood
- Hydroduct drainage sheets
- Adjacent sub-structures

Substrates should be uniform with no gaps or voids greater than 12 mm. Where these exist fill with a material of sufficient strength to support the membrane. All substrates must be free of loose aggregate and sharp protrusions. Where possible, avoid rounded concrete blinding. The surface does not need to be dry, but standing water must be removed. Substrates must have sufficient rigidity not to move during the concrete pour. Boarded substrates must be close butted to provide support and not more than 12 mm out of alignment.

Installation - General

Please refer to Preprufe®Plus Application Manual for detailed instructions.

Preprufe®Plus membrane is available in two versions, Preprufe®300R Plus and 160R Plus for application above +5 °C and Preprufe®300R Plus LT and 160R Plus LT for application between -5 °C and +30 °C. Preprufe®Tape is also available in two versions, Preprufe®Tape HC for application above +10 °C and Preprufe®Tape LT for application between -5 °C and +30 °C.

Preprufe®ZipLap™ – Preprufe®Plus membranes are supplied in rolls 1.18 m wide including the Preprufe® ZipLap™ incorporating dual adhesive layers with coloured zip strips at the top and bottom of the seam area on the edge of the roll. The zip strips keep the lap area clean and dry until the moment the ZipLap™ is made and enables even stronger bonded laps between adjacent rolls. Both zip strips cover an aggressive adhesive. Once the green zip strip on the top of the membrane and the blue zip strip on the bottom of the membrane are removed, a strong adhesive to adhesive bond is achieved in the overlap area. Minimum application temperature for ZipLap™ is 0 °C (Preprufe®Plus LT membrane). Preprufe® can continue to be installed to a minimum of -5 °C using instead Preprufe®Tape LT to overband all laps. Preprufe®Tape should be applied to clean dry surfaces and the release liner must be removed immediately after application.

Installation - Horizontal

Place the membrane with the green zip strip facing towards the concrete pour. Kick out or roll out the membrane with HDPE film side to the substrate. End laps should be staggered to avoid a build up of layers. Leave green and blue zip strips on the membrane until overlap procedure is completed. Accurately position succeeding sheets to overlap the previous sheet 3 in. (75 mm) along the marked selvedge. Peel back and remove both the green and blue zip strips in the overlap area to achieve an adhesive to adhesive bond at the overlap. Ensure a continuous bond is achieved without creases and **roll firmly with a heavy roller**. On completion of the installation, ensure **complete removal of the plastic zip strips from all overlaps and Tape**.

Installation - Vertical

Apply the membrane with the green zip strip facing towards the concrete pour. Mechanically fasten the membrane vertically using flat headed fixings appropriate to the substrate. The membrane may be installed in any convenient length. Secure the top of the membrane using a batten or fixing 50 mm below the top edge. Use fixings at typically 600 mm centres to secure the membrane flat against the substrate. Fixings can be made through the selvedge, this allows firmly rolled overlaps, which are covered by the subsequent strip of Preprufe®Plus membrane. Any exposed fixings should be patched with Preprufe®Tape.

Peel back and remove both the green and blue zip strips in the overlap area to achieve an adhesive to adhesive bond at the overlap. Ensure a continuous bond is achieved without creases and roll firmly. On completion of the installation, completely remove the plastic zip strips from all overlaps and Tape.

Removal of Form-work

Preprufe®Plus membranes can be applied to removable single and double sided formwork, slab perimeter formwork, pile caps, etc.

Once concrete is poured the formwork must remain in place until the concrete has gained sufficient compressive strength to develop the surface bond with the Preprufe®Plus membrane. A minimum concrete compressive strength of 10 N/mm² is recommended prior to stripping formwork supporting Preprufe®Plus membranes. Premature stripping may result in loss of adhesion between the membrane and concrete.

Limitations of Use

It is recommended that concrete be poured within 56 days (42 days in hot climates) of application of the membrane.

NBS Specification

Refer to clause J40 297

Health and Safety

There is no legal requirement for a Safety Data Sheet for Preprufe®Plus. For Bituthene®LM read the product carton and Safety Data Sheet (SDS) before use. Users must comply with all risk and safety phrases. SDS's can be obtained from GCP Applied Technologies or from our web site at gcpat.com.

Product Description

Preprufe®Plus waterproof membranes are composite sheets comprising a robust virgin HDPE backing, a pressure sensitive adhesive and a trafficable weather resistant coating with dual adhesive Preprufe® ZipLap™ for increased security and practicability at overlap.

GCP has combined its proven Advanced Bond Technology™ – together with more than 25 years of major project experience to produce its highest performing waterproofing membrane with even more practical and economic benefits.

Advanced Bond Technology™ – The membranes develop a continuous adhesive bond to concrete poured on or against it, preventing water migration between the structure and the membrane, significantly improving protection against leaks.


Installation benefits – Preprufe®Plus membrane is simple, fast and secure. Ancillary products are limited to a single tape and Bituthene®Liquid Membrane for detailing. The full application can be executed by only two operators, saving labour cost and time. Unique Preprufe®ZipLap™ allow instant lap forming even in adverse conditions.

Applications

- Water and vapour proofing for all basement grades to BS8102:2009
- Waterproofing civil engineering sub – structures
- Gas resistance – methane, carbon dioxide and radon gas protection according to BS 8485 (see section 7.2.4), BRE Reports 211 (radon) and 212 (methane and carbon dioxide). Independent test results available upon request.
- Protection of reinforced concrete structures in aggressive ground including the harshest conditions of the Arabian Peninsula.


Independent Assessments

- BBA Certificate No. 97/3325
- Mott MacDonald Special Services Report May 2001
- Technische Hochschule Nuremberg (THN) report February 2017
- STUVAtec report December 2016
- International Certifications

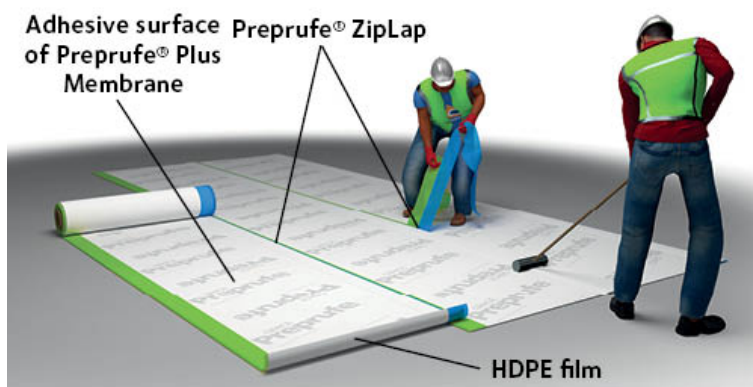

Internal and External Corners

Internal & external corners are easily formed as shown in the diagrams below (refer to Preprufe®Plus Application Manual for more details). Ensure that all laps are 100 mm minimum, taped with Preprufe®Tape and well rolled. Crease and fold the membrane to ensure a close fit to the substrate profile.

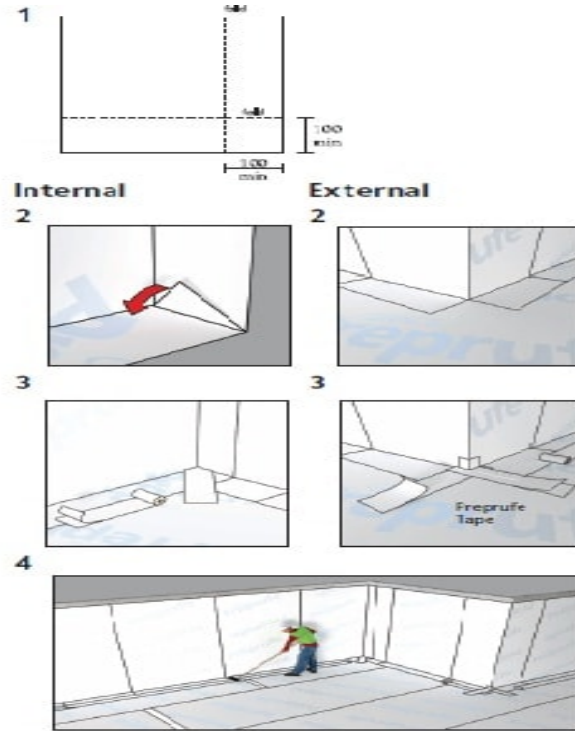

End Laps and Cut Edges

Overlap all roll ends and cut edges by a minimum 75 mm and ensure the area is clean and free from contamination, wiping with a damp cloth if necessary. Allow to dry and apply Preprufe®Tape centred over the lap and roll firmly. Refer also to Preprufe®Plus Standard Details.



Penetrations

To seal around penetrations such as service pipes, pile heads, lightning conductors, etc. mark and cut membrane tight to the penetration. If the membrane is not aligned within 12 mm of the penetration, apply Preprufe®Tape lapped onto the membrane and butted tight to the penetration. For pipe penetrations, wrap the pipe with Preprufe®Tape. Mix and apply Bituthene®LM around the penetrations using a fillet to provide a watertight seal between the Preprufe®Plus membrane and Tape. Refer also to Preprufe®Plus Standard Details.


Membrane Repair

Inspect the membrane for damage before installation of reinforcement steel, shuttering and final placement of concrete. Clean if required. See Preprufe®Plus Application Manual for more details or contact Tech Service.

Wipe the area with a damp cloth to ensure the area is clean and free from dust, and allow to dry. For minor repairs, apply Preprufe®Tape centrally over the damaged area and roll firmly. For larger repairs use a patch of Preprufe®Plus membrane and tape all edges with Preprufe®Tape. Remove plastic release liner from Tape.

Wall Waterproofing Options

GCP also offers alternatives to pre-applying Preprufe®Plus membranes to vertical formwork. For conventional application to walls after formwork removal use Preprufe®800PA membrane - self adhesive sheet waterproofing membrane. See separate data sheet for further information.

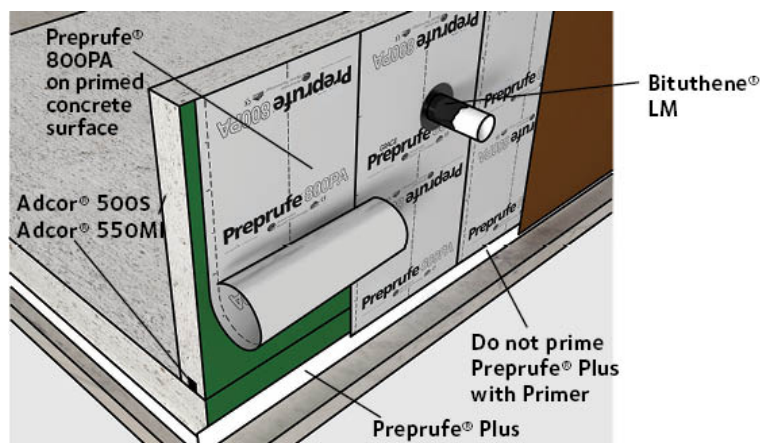

Preprufe®800PA post-applied to walls in conjunction with Preprufe®Plus below slabs

Preprufe® Plus Preparation When Preprufe® 800PA Is Used on Walls

Inspect the Preprufe® Plus membrane around the perimeter edge of the concrete slab. Identify any exposed non-selvedge overlaps in Preprufe® Plus membrane. To ensure continuity of the fully bonded system, carefully cut and remove a 75 mm triangular piece of the top flap of Preprufe® Plus membrane only, as shown shaded in the standard detail, Slab Perimeter Detail – non selvedge lap. Please refer to Preprufe® Plus Application Manual for more details.



SUPPLY

| Preprufe® | 300R Plus | 160R Plus | Tape LT* or HC* |
|-------------------------------|---------------------------------------|-------------|-----------------|
| Thickness (nominal - mm) | 1.2 | 0.8 | 0.7 |
| Roll size (m) | 1.18 x 31.0 | 1.18 x 36.5 | 100 mm x 15 |
| Roll area (m ²) | 36 | 42 | |
| Roll weight (kg) | 50 | 42 | 2 |
| Minimum edge end laps (mm) | 75 | 75 | 75 |
| Ancillary Products | | | |
| Adcor® 500S / T | 6 x 5m rolls | | |
| Adcor® 550MI / T-MI | 8 x 5m rolls | | |
| Bituthene® LM | 5.7 litre pack | | |
| AT System | Factory made junctions & fabrications | | |

TYPICAL PROPERTIES

| | 300R Plus | 160R Plus |
|---|-----------|-----------|
| Adhesion to concrete (N/mm) EN 1372 | 2.88 | 2.88 |
| Shear strength of joints (N/mm) EN 12317-2 | 14.5 | 14.5 |
| Hydrostatic head resistance (m) ASTM D 5385 mod. | > 70 | > 70 |
| Puncture resistance (N) ASTM E154 | 990 | 445 |

DECLARED VALUES ACCORDING TO EN 13967

| Property | Declared Value | | | | Test Method | Property | Declared Value | | | | Test Method |
|---------------------------------|----------------|--------------|--------------|--------------|-------------|---|----------------|---------------|---------------|---------------|--|
| Preprufe® | 160R Plus | 300R Plus | 160R Plus | 300R Plus | | Preprufe® | 160R Plus | 300R Plus | 160R Plus | 300R Plus | |
| | | | LT | LT | | | | | LT | LT | |
| Visible defects - MDV | None | None | None | None | EN 1850-2 | Joint strength (N/50mm) - MLV | ≥ 480 | ≥ 850 | ≥ 480 | ≥ 850 | EN 12317-2 |
| Straightness - MDV | Pass | Pass | Pass | Pass | EN 1848-2 | Water vapour transmission (μ= sD/d) - MDV | 700.000 ± 30% | 700.000 ± 30% | 800.000 ± 30% | 800.000 ± 30% | EN 1931 Method B |
| Length (m) - MDV | 36.65 ± 0.25 | 31.15 ± 0.25 | 36.65 ± 0.25 | 31.15 ± 0.25 | EN 1848-2 | Durability of water tightness against ageing/ degradation (at 60 kPa) | Pass | Pass | Pass | Pass | EN 1296 EN 1928 Method B |
| Thickness (mm) - MDV | 0.85 ± 0.06 | 1.23 ± 0.08 | 0.85 ± 0.06 | 1.23 ± 0.08 | EN 1849-2 | Durability of water tightness against chemicals (at 60 kPa) | Pass | Pass | Pass | Pass | EN 1847 Method B EN 1928 Method B |
| Width Carrier Sheet (m) - MDV | 1.18 ± 0.010 | 1.18 ± 0.010 | 1.18 ± 0.010 | 1.18 ± 0.010 | EN 1848-2 | Compatibility with bitumen | Pass | Pass | Pass | Pass | EN 1548 |
| Mass per unit area (g/m²) - MDV | 810 ± 50 | 1150 ± 50 | - | - | EN 1849-2 | Resistance to static loading | ≥ 20 - Pass | ≥ 20 - Pass | ≥ 20 - Pass | ≥ 20 - Pass | EN 12730 |

| | | | | | | | | | | | |
|---|-------|-------|-------|-------|------------|---|-------------------------|-------------------------|-------------------------|-------------------------|---------------------|
| Water tightness to liquid water (at 60 kPa) | Pass | Pass | Pass | Pass | EN 1928 | Tensile properties - unreinforced sheets (N/50mm) - MLV | Long ¹ ≥ 60 | Long ¹ ≥ 110 | Long ¹ ≥ 60 | Long ¹ ≥ 110 | EN 12311-2 Method A |
| Resistance to impact (Al-board (mm) - MLV) | ≥ 250 | ≥ 400 | ≥ 250 | ≥ 400 | EN 12691 | Tensile properties - unreinforced sheets (Elongation %) - MLV | Long ¹ ≥ 4.5 | Long ¹ ≥ 4.5 | Long ¹ ≥ 4.5 | Long ¹ ≥ 4.5 | EN 12311-2 Method A |
| Resistance to tearing (Nail Shank)- unreinforced sheets (N) - MLV | ≥ 300 | ≥ 450 | ≥ 300 | ≥ 450 | EN 12310-1 | Reaction to fire (Class; test conditions) | E | E | E | E | EN 13501-1 |

Footnotes: 1. Longitudinal - related to the roll direction 2. Transversal - related to the roll direction 3. MDV: Manufacturer Declared Value 4. MLV: Manufactured Limiting Value 5. NPD: No Performance Declared.

All declared values shown in this data sheet are based on test results determined under laboratory conditions and with the product sample taken directly from stock in its original packing without any alteration or modification of its component parts.

gcpat.uk | United Kingdom customer service: +44 (0) 1480 478421

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate, and is offered for consideration, investigation and verification by the user, but we do not warrant the results to be obtained. Please read all statements, recommendations, and suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation, or suggestion is intended for any use that would infringe any patent, copyright, or other third party right.

PREPRUFE is a trademarks, which may be registered in the United States and/or other countries, of GCP Applied Technologies Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status.

© Copyright 2018 GCP Applied Technologies Inc. All rights reserved.

GCP Applied Technologies Inc., 62 Whittemore Avenue, Cambridge, MA 02140 USA

In the UK, Ipswich Road, Slough, Berkshire, SL1 4EQ, UK

This document is only current as of the last updated date stated below and is valid only for use in the United Kingdom. It is important that you always refer to the currently available information at the URL below to provide the most current product information at the time of use. Additional literature such as Contractor Manuals, Technical Bulletins, Detail Drawings and detailing recommendations and other relevant documents are also available on www.gcpat.uk. Information found on other websites must not be relied upon, as they may not be up-to-date or applicable to the conditions in your location and we do not accept any responsibility for their content. If there are any conflicts or if you need more information, please contact GCP Customer Service.

Last Updated: 2019-04-02

gcpat.uk/solutions/products/preprufe-pre-applied-waterproofing-solutions/preprufe-plu-s-membranes