

# Fosroc® Proofex 3000MR

constructive solutions

## High performance methane, radon and CO<sub>2</sub> resisting solar reflective waterproof membrane for basements and structures

### Uses

A high performance self adhesive membrane for resisting methane, radon and CO<sub>2</sub>, and preventing water entering buildings. Proofex 3000MR also provides a vapour and waterproof membrane to water excluding structures and protects concrete from attack by aggressive ground salts.

### Advantages

- Aluminium film provides methane, radon and CO<sub>2</sub> resistance, protection against damage and gives dimensional stability
- Solar reflective finish reduces heat gain whilst membrane is exposed during construction.
- Combines toughness with flexibility for detailing around corners, pipes, etc.
- Self adhesive layer system makes installation quick, simple and reliable
- Resistant to ground water, soluble sulphates and chlorides
- Type A waterproofing barrier membrane, as defined in BS 8102:2009, 'Protection Of Structures Against Water From The Ground'

### Description

Proofex 3000MR is a cold applied, flexible, methane resisting and waterproof high performance membrane incorporating an aluminium layer and a polymer modified bitumen compound on a high strength polymer backing film.

Where methane, radon or CO<sub>2</sub> is present, a comprehensive site survey must be carried out and the building constructed accordingly. Refer to Building Research Establishment Report 212 and CIRIA Guide 149 for further information.

Proofex 3000MR should be laid in accordance with the provisions of BS 8102:2009.

### Standard compliance

Compliant with the permeability requirements of BS 8485: 2015 Table 7 (sheet and joints)

Proofex 3000MR complies with EN 13707:2004 and EN 13969:2004.

Independently certified performance, BBA certificate (No. 09/4663).

Independently certified for solar reflectance index to ASTM E1980.



 0120	
<b>Fosroc Ltd</b> Drayton Manor Business Park, Coleshill Road, Tamworth, B78 3XN, UK <b>08</b> <b>DOP: UK9-55</b> <b>0120-CPD-GB08/75673</b>	
Proofex 3000MR	
EN 13707:2004 and EN 13969:2004 Flexible sheets for waterproofing	
Thickness (EN1849-1)	1.2mm
Tensile Strength (EN 12311-1)	Long. 180 N/50 mm Trans. 190 N/50 mm
Elongation at Break (EN 12311-1)	Long. >20% Trans. >30%
Resistance to impact (EN12691)	Met. A ≥ 1750mm Met. B ≥ 1000mm
Static load resistance (EN 12730)	Met. A 15 Kg Met. B 20 Kg
Tear Resistance (EN 12310-1)	Long. ≥ 45 N Trans. ≥ 40 N
Impermeability (EN 1928)	Method A Pass
Vapour transmission rate (EN1931)	Sd ≥ μ3960000±30%

# Fosroc® Proofex 3000MR

## Properties

Radon Transmission Rate	0.47 x 10 <sup>-9</sup> m/s
Permeability to Radon Gas	0.56 x 10 <sup>-12</sup> m <sup>2</sup> /s
Permeability to Methane Gas (membrane) (BS ISO 15105-1)	< 5 ml/day/m <sup>2</sup> /atm
Permeability to Methane Gas (lapped) (BS ISO 15105-1)	< 1 ml/day/m <sup>2</sup> /atm
Application temperature	+ 5°C / + 45°C
Service temperature	- 40°C / +80°C
Adhesion to primed concrete (ASTM) D1000)	4.9 N/mm
Solar Reflectance Index (ASTM E1980)	103

## Application instructions

### Surface preparation

All concrete surfaces must be a wood float or shutter finish and free from cavities or projections.

Masonry surfaces must be flush pointed and free of voids.

All surfaces must be clean, dry and free from contamination, ice and frost.

### Priming

Vertical and suspended slab surfaces shall be primed with Proofex Primer or Nitobond HAR. Ensure complete coverage and allow to dry. Only prime an area to which the Proofex 3000MR can be applied the same day. Very porous surfaces may require more than one coat of primer.

### Angle and corner details

Use Proofex Angle Fillet strips fixed using 6 mm beads of Nitoseal MB175 at all wall to floor junctions.

All internal and external angles should be reinforced with Proofex Detail Strip or a 300 mm wide strip of Proofex 3000MR. Where possible, a 25 mm chamfer should be provided to external angles.

### Application

Application temperature range with Proofex Primer: 5°C to 35°C.

Application temperature range with Nitobond HAR: 10°C to 35°C.

### Vertical application:

Cut the Proofex 3000MR to length allowing 150 mm for the end laps and position by peeling back the release paper and applying the self adhesive face to the prepared surface.

Start at the top of the wall and work down by progressively removing the release paper in stages. Proofex 3000MR should be applied to ensure that all end laps are weathered.

In cold weather temporary batten support of the Proofex 3000MR membrane is recommended.


### Horizontal application:

Completely unroll the Proofex 3000MR membrane and place against a chalk line. One half of the roll should then be rolled up to the mid point, the release paper carefully cut without damaging the Proofex 3000MR membrane and progressively removed from the mid point out to the end of the roll.

This process should be repeated on the other half of the roll. The Proofex 3000MR membrane should be brushed onto the surface to ensure good bonding.

The next roll or length is aligned against the previously applied piece allowing for the 50 mm minimum (or as specified) edge laps and 150 mm end laps and applied as stated previously. The edge and end laps should be rolled to ensure complete adhesion and continuity between the layers.

For deck waterproofing applications where the lapping arrangement results in a side lap detail / end lap detail interface apply a 10mm diameter bead of Nitoseal MB175 to seal the joint as illustrated below:

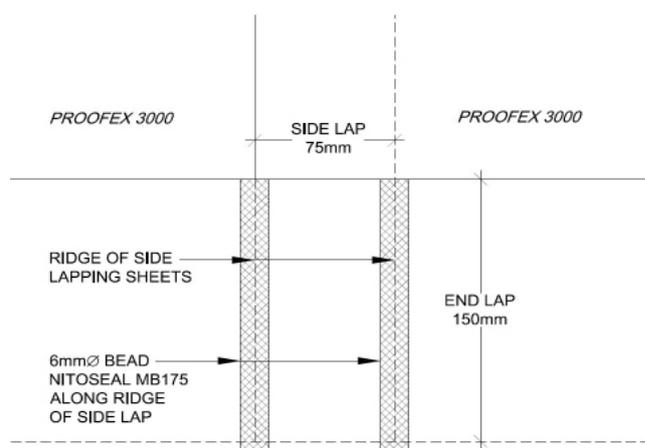

### Penetrations

Penetrations e.g. pipe entries through the Proofex 3000MR membrane require special attention to detail. Proofex Top Hats are recommended and should be stuck to membrane using Proofex Total Tape and sealed to pipe with Nitoseal MS60.

### Protection

Proofex 3000MR membrane should be protected from physical damage and weathering within 3 to 4 days after application. Surfaces should be protected from damage by Proofex Protection Board.

Proofex 3000MR can also be covered with Proofex Sheetdrain to give both protection and a drainage layer.

# Fosroc® Proofex 3000MR

## Backfilling

Backfill must be free from any sharp objects or debris which could damage the Protection/Proofex 3000MR. It should not contain any rocks or boulders larger than 50mm.

Backfilling should be carried out as soon as possible after application, preferably the same day.

## Ancillary products

### Proofex Protection Board

Bitumen impregnated board, designed to protect membranes from damage through backfilling and trafficking.

### Proofex Detail Strip

A reinforced, double sided waterproof adhesive tape for use as reinforcing at all floor and wall junctions. It consists of a strong synthetic fibre fabric impregnated and coated both sides with a butyl adhesive, which is protected by a removable siliconised paper.

### Proofex Top Hat

MDPE sheathing, which encapsulates an aluminium foil layer.

### Proofex Angle Fillet

Strips fixed at all floor and wall junctions with a 6mm bead of Nitoseal MB175.

## Estimating

### Proofex 3000MR

Roll size:	1 m x 20 m
Roll area:	20 m <sup>2</sup>
Edge laps:	50 mm minimum
End laps:	150 mm minimum
Roll weight:	25 kg

### Proofex Primer

Coverage:	6 to 8 m <sup>2</sup> /litre
Minimum installation temperature:	+4°C rising
Drying time @ 20°C:	1 to 2 hours
Pack size:	5 ltr and 25 ltr drums

### Nitobond HAR

Coverage:	4 to 6 m <sup>2</sup> /litre
Minimum installation temperature:	+10°C rising
Drying time @ 20°C:	2 hours (dependant on humidity)
Pack size:	1, 5 and 25 litres

### Proofex Detail Strip

Thickness:	1.5 mm
Roll size:	200 mm x 10 m

### Proofex Protection Board

3 mm Thickness:	1000 mm x 2000 mm
Coverage:	2.0 m <sup>2</sup>

## Storage

Proofex 3000MR must be stored in dry conditions, away from sunlight, in an upright position at a temperature between 5°C and 40°C.

Proofex Primer has a shelf life of 2 years. The 25 litre tins of Proofex Primer should not be stacked more than 2 high.

Nitobond HAR has a shelf life of 1 year.

## Precautions

### Health and safety

For information on Proofex Primer refer to Product Safety Data Sheet.

Proofex Primer is flammable. Keep away from sources of ignition. No smoking. In the event of fire, extinguish with CO<sub>2</sub> or foam. Do not use a water jet.

### Flash Point

Proofex Primer: >39°C

Fosroc and Proofex are trademarks of Fosroc International Limited



#### Important note

Fosroc products are guaranteed against defective materials and manufacture and are sold subject to its standard Conditions for the Supply of Goods and Services, copies of which may be obtained on request. Whilst Fosroc endeavours to ensure that any advice, recommendation, specification of information it may give is accurate and correct, it cannot, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance with any advice, specification, recommendation of information given by it. All Fosroc datasheets are updated on a regular basis. It is the user's responsibility to obtain the latest version.

## Fosroc Limited

Drayton Manor Business Park  
Coleshill Road, Tamworth,  
Staffordshire B78 3XN. UK

[www.fosroc.com](http://www.fosroc.com)

telephone:  
+44 (0) 1827 262222

fax:  
+44 (0) 1827 262444

email:  
enquiryuk@fosroc.com



Certificate number FM 610