

Stopseal® Ablative Coating is a highly advanced flexible coating for use when installing the Stopseal® Batt System. The Stopseal® Ablative Coated is used to seal in the Stopseal® Batt to reinstate the fire resistance performance of wall and floor constructions where apertures are penetrated by single or multiple services.

Stopseal® Ablative Coating is tested and Certified as part the FSi Fire Stopping range. The Stopseal® Ablative Coating when used as part of the Stopseal® Batt System can be installed across a variety services and substrates including,

- Flexible and Rigid Walls
- Rigid Floors
- Multi-Service penetrations
- Blank Openings
- Head of Walls

Areas of Use:

- To reinstate fire resistance through walls and floors
- Prevention of air leakage
- Maintains Acoustic performance
- Assumed working life 30 years
- For internal use

Advantages:

- Highly flexible, high performance flexible ablative coating, making cutting and install easy
- Simple to install, through spray or brush application.
- Tested practically, with the installer in mind.
- Provides smoke seal.
- Manufactured and tested alongside the entire FSi Fire Stopping range in the UK.

Certification & Testing:

- Tested in accordance with EN1366-3:2009 – Fire Resistance – Penetration Seals
- Classified in accordance with EN13501-2 – Fire Resistance
- CE Marked – ETA 14-0005
- Tested in accordance with ASTM E2923:14 – Longevity of Fire Stop Materials
- Certifire Accreditation – CF513
- ULEU Accreditation



Certifications



UAE Certificate of Compliance

تدريجاً هذا كيميائية التي ارام ال ا كلود
توليد اهل ا كز او
يوندل ا جفليل دم اجل ، كد لوقول ا
كي بل اجل ات اربيح بل ا د ، مبح ا نجل
بيور مثل ا د ا م ا و ر كرسجل اتويبو



ETA 14-0005

CE-1121-CPR-JA5021




APPROVED
CF513



Please refer to FSi Technical Data Sheets and Technical Manual for more information

Overview

Description	Result
Density - ISO 2811-1	1.35g/cm3
Longevity of Fire Stop Material - ASTM E2923:14	30 Years
Size	5kg, 10kg, 20kg
Colour	White, Grey, Black, Red
Packaging	Grey Pails, Green lids
Product Code	FSI5
Associated Products	Pyrocoustic Sealant, PyroPro HPE Sealant, PipeBloc PCP Collar, PipeBloc EL Wrap
Shelf Life	12 months if stored in accordance with storage conditions

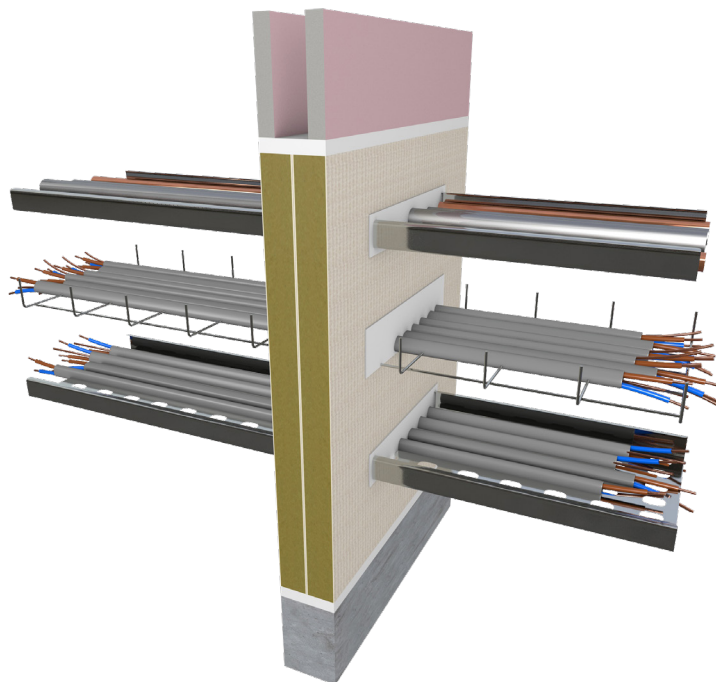

FSi has Technical Representatives who provide assistance in the selection and specification of FSi products. For more information, specification and technical advice please call our Head Office on Tel: +44 (0) 1530 515130. Guarantee / Warranty: FSi products are manufactured to rigid standards of quality. Any product which has been applied in accordance with FSi's written instructions and in any application recommended by FSi, but which is proved to be defective in product quality, will be replaced free of charge. No liability can be accepted for the information provided in this document although it is published in good faith and believed to be correct. FSi Limited reserves the right to alter product specifications without prior notice, in line with our Company policy of continuous development and improvement.