<text>

WHERE TO USE

Mapecolor Paste is a coloured paste which may be added to neutral epoxy formulations such as **Primer SN**, **Mapefloor I 300 SL**, **Mapefloor I 500 W**, **Mapecoat I 620 W** and **Mapecoat I 24** to add colour to **Mapefloor** systems.

Mapecolor Paste is available in 19 standard RAL colours to satisfy all finishing requirements:

| RAL 1001 Beige | RAL 6019 Pastel green |
|-------------------------|-----------------------|
| RAL 1013 Pearl white | RAL 6021 Pale green |
| RAL 1015 Light ivory | RAL 7001 Silver grey |
| RAL 3009 Oxide red | RAL 7030 Stone grey |
| RAL 3016 Coral red | RAL 7032 Pebble grey |
| RAL 5007 Brilliant blue | RAL 7034 Yellow grey |
| RAL 5012 Light blue | RAL 7035 Light grey |
| RAL 5024 Pastel blue | RAL 7037 Dusty grey |
| RAL 6001 Emerald green | RAL 7040 Window grey |
| RAL 6017 May green | |

If other RAL colours are required, please consult the Mapei Technical Services Department.

TECHNICAL CHARACTERISTICS

Mapecolor Paste is formulated using selected pigments and grinding vehicles using solvent-free solutions according to a formula developed in the MAPEI R&D laboratories. Mapecolor Paste also guarantees excellent wettability and resists well during storage which helps the pigments remain more stable.

Mapecolor Paste coloured pastes may be used to colour neutral epoxy formulations directly on site which avoids having to store batches of pre-coloured products.

RECOMMENDATIONS

• Do not apply if the temperature is lower than +10°C.

APPLICATION PROCEDURE

Mapecolor Paste must be mixed slowly into the epoxy products which make up the **Mapefloor System** to avoid the formation of air bubbles.

We recommend mixing the paste well before use to make sure the product is smooth and even.

CONSUMPTION

From 5 to 10% by weight dependent on the product to be coloured.

PACKAGING

Mapecolor Paste is available in 0.7 kg drums.

STORAGE

Mapecolor Paste remains stable for 24 months if stored in its original packing at a temperature of between +10°C and +30°C. Protect from frost.

SAFETY INSTRUCTIONS FOR PREPARATION AND INSTALLATION

Mapecolor Paste is not considered hazardous according to current norms and guidelines regarding the classification of mixtures. However, we recommend the use of protective gloves and goggles, and to take the usual precautions for handling chemicals.

For further and complete information about the safe use of our product please refer to the latest version of our Material Safety Data Sheet.

PRODUCT FOR PROFESSIONAL USE.

WARNING

Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product.

Please refer to the current version of the Technical Data Sheet, available from our website www.mapei.com






TARIAS

| TECHNICAL DATA | (typical valu | De) |
|-----------------------|---------------|-------------|
| I EOIINIOAE DAIA | | C 3J |

| PRODUCT IDENTITY | | |
|---|--------------------------|--|
| Appearance: | paste | |
| Colour: | 19 different RAL colours | |
| Dry solids content (%): | 99 ± 1 | |
| APPLICATION DATA (at 23°C and 50% R.H.) | | |
| Application temperature range: | from +10°C to +30°C | |

All relevant references for the product are available upon request and from www.mapei.com

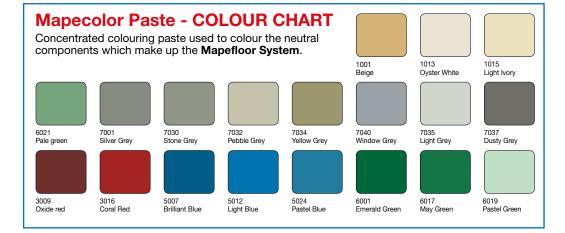

Note: the Mapecolor Paste colour codes refer to the RAL colour chart.

